


50 YEARS



GlossMA X PRO



GLOBAL PLAYER
OF THE WOOD BASED
PANEL INDUSTRY



CONTENTS

TECHNICAL FEATURES

ADVANTAGES OF GLOSSMAX PRO

DECORS



GLOSSMAX PRO

GLOSSMAX PRO high gloss panel is a wooden panel with decorative glossy surface, which is produced by applying glue and UV acrylic lacquer onto the surface of melamine coated MDF or Particle Board through various industrial processes with advanced and unique technology. Higher surface quality and an impressive glossiness has been achieved with the minimized surface effects thanks to the Calender Coating Inert technology. After the chemical curing of the Polymeric glue (hot coating) process, which provides not only physical but also excellent chemical adhesion to the melamine coated surface, a superior surface is obtained by applying lacquer with respect to cutting quality and workability compared to other glossy surfaces.


2100x2800 mm



GLOSSMAX PRO MDF



GLOSSMAX PRO PARTICLE BOARD

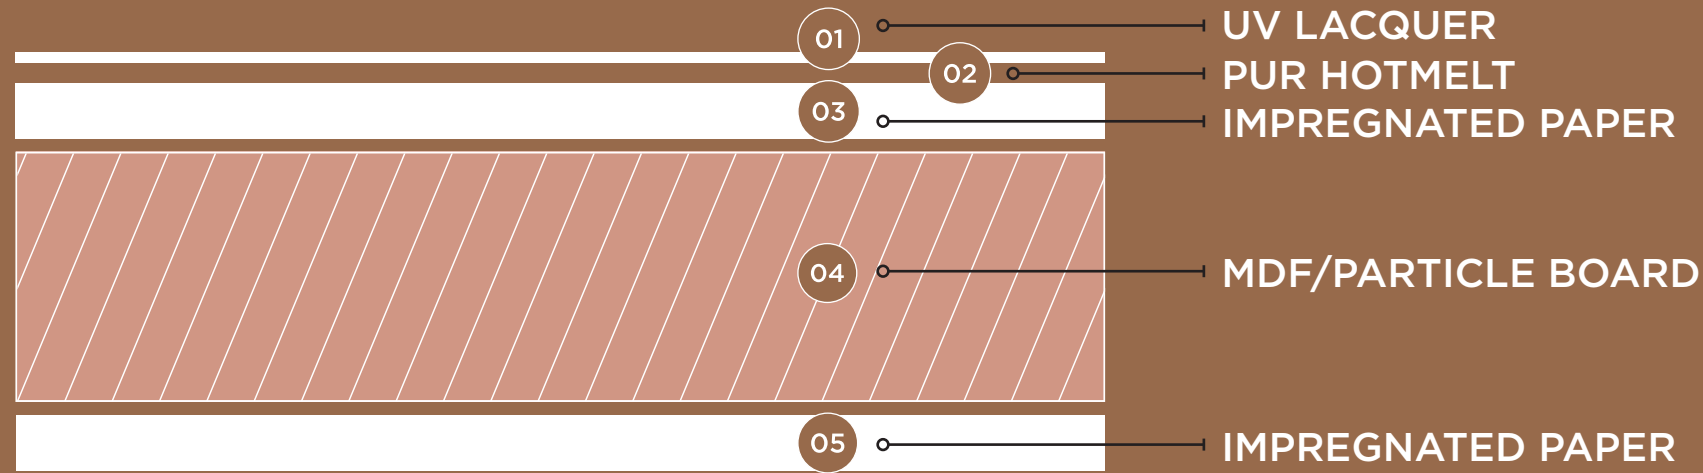

- 01** **UV LACQUER**
100% UV acrylic lacquer
- 02** **PUR HOTMELT**
Patented glue providing 100% chemical adhesion
- 03** **IMPREGNATED PAPER**
Impregnated decorative paper
- 04** **MDF/PARTICLE BOARD**
Produced in accordance with TS EN 312/TS EN 622-5 norms.
- 05** **IMPREGNATED PAPER**
Impregnated decorative paper

PANEL FEATURES

TYPE OF PANEL	MDF-PARTICLE BOARD
PANEL THICKNESS	8-16-18 mm
PANEL DENSITY	MDF 8 mm 815 kg/m ³ , 16-18 mm 715 kg/m ³ Particle Board 8 mm 680 kg/m ³ , 16-18 mm 625 kg/m ³
PANEL SIZE	2100x2800 mm
FRONT FACE OF THE PANEL	High gloss and scratch resistant decorative surface obtained as a result of applying glue and 100% UV acrylic lacquer on the surface of melamine coated MDF or Particle Board, using the Calender Coating Inert
REAR FACE OF THE PANEL	Impregnated paper

ADVANTAGES OF GLOSSMAX PRO

MAXIMUM PERFORMANCE

High gloss and surface resistance...

With patented PUR glue application technology, it has a much better cutting and processing capability than its counterparts in the market.

High protection is provided until the moment of delivery by the foil and protecting foam on the surface during the process.


MAXIMUM ADAPTATION

In the same colors and patterns with the Kastamonu Entegre Medelam&Teknolam...

One side of the decorative panel is glossy and the other side is covered with the same colored decor paper. It can be applied to all melamine coated decors. In this way, color integrity is ensured on the rear and front surfaces of the panels. The decorative panel attracts attention with its high level of natural surface appearance. It is produced as MDF and Particle Board with rich color variety.

MAXIMUM SERVICE

Kastamonu Entegre's high production capacity and superior service quality...



HIGH GLOSS

Perfect reflection and impressive appearance



SCRATCHING RESISTANCE

Technical Details: TS EN 14323;
Resistant to impacts and scratches up to 2-3,5 Newtons




SUPERIOR SURFACE QUALITY

An almost-perfect surface quality has been achieved thanks to the minimized surface effects. With this feature, it is an indispensable product of high prestige projects.



RESISTANCE TO CHEMICALS AND STAIN

Technical Details: TS EN 14323; stain retention strength
Limit: 3° min, Kastamonu Entegre: 4°; TS EN 12720: 2009 (table A.1 liquids; ethyl alcohol, olive oil, water, nescafe, black tea, concentrated milk, 5° up to 24h)



CRACKING RESISTANCE

Technical Detail: TS EN 14323
Limit: $\geq 3^\circ$; Kastamonu Entegre: 5°



EASY TO CLEAN

Moist-cotton cloth and soapy cotton cloth should be used for cleaning the products.



MAXIMUM SIZE

2100x2800 mm in size, far from the limited work requirement... The world's first 2100x2800 mm panel size provides users with an efficient optimization opportunity that offers low waste production solutions.



HYGIENIC




AREAS OF USAGE*

Kitchen cabinet, bathroom cabinet, bedroom, rail cabinet, teen room, office furniture, decoration, and all modular products...


*Suitable for indoor usage.

TEST NO	CONTROL CRITERIA	TEST METHOD	STANDARD LIMITS	UNIT	KASTAMONU ENTEGRE PERFORMANCE
1	THICKNESS	TS EN 14323	$\leq 20 \pm 0,3$ $> 20 \pm 0,5$	mm	$\pm 0,3$
2	DENSITY	TS EN 323	Kastamonu specific	kg/m ³	MDF 8 mm 815 kg/m ³ , 16-18 mm 715 kg/m ³ Particle Board 8 mm 680 kg/m ³ , 16-18 mm 625 kg/m ³
3	FLATNESS	TS EN 14323	"Thickness ≥ 15 mm / ≤ 2 (only for the stabilized surfaces)"	mm/m	0
4	RESISTANCE TO SCRATCHES	TS EN 14323	Class B $2 \leq t < 3,5$	Newton	3,5
5	RESISTANCE TO MICRO-SCRATCHES	TSE CEN TS 16611	GLOSS CHANGE (<60%) (Kastamonu specific)	%	20
6	RESISTANCE TO CRACKING	TS EN 14323	≥ 3	Degree	5
7	STRENGTH AGAINST COLORIZATION	TS EN 14323	≥ 3	Degree	5
8	RESISTANT TO COLD LIQUIDS	TS EN 12720:09	5	Degree	5
9	RESISTANCE TO DRY HEAT	TS EN 12722:09	5th Degree, 70° C	Degree	5th Degree, 70° C
10	RESISTANCE TO WET HEAT	TS EN 12721:10	5th Degree, 70° C	Degree	5th Degree, 70° C
11	GLOSSY	TS EN 14323	20° min. 85 GU; 60° min. 90 GU;	Gloss	88 95
12	ADHESION	TS EN 2409	0-1	Degree	0
13	SURFACE DEFECTS	Kastamonu specific Surface Fault Dignasis Table	Must Be Suitable.	mm	Suitable
14	MAJOR BALL STRENGTH	TS EN 14323	max. 150	cm	150
15	MIRROR EFFECT	Kastamonu specific	min. 6	Degree	10
16	FREE FORMALDEHYDE RELEASE	TS EN 12460-3	E1 $\leq 3,5$ E2 ≤ 8	mg/m ² h	0,67
17	ANTIBACTERIAL IMPACT	JIS Z 2801	R ≥ 2	kob/cm ²	R ≥ 2 , effective at 99.99%
18	LIGHT FASTNESS	TS EN 15187	Blue Wool will never worse than Scale 6. Grey will never be worse than scale 4.	Skala	*Suitable *Only for the pigmented products.
19	SURFACE STABILITY	TS EN 311	≥ 1	N/mm ²	1,30
20	COLOR VALUE	CIELab D65/10°	*Pigmented ones $\Delta E \leq 0.70$ Delta E In Manufacture of Transparent Polishes: ≤ 1.20		*Pigmented ones $\Delta E \leq 0.70$ Delta E In Manufacture of Transparent Polishes: ≤ 1.20

*For any detail about pigmented products resistant to UV rays, please consult the relevant "Sales Representative".



D215 ARCTIC WHITE (PIGMENTED)

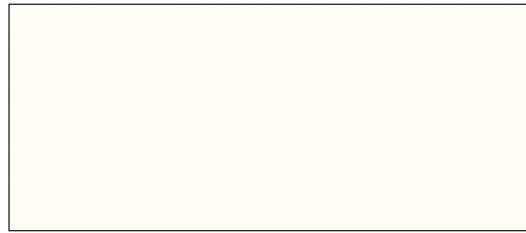


D214 PORCELAIN WHITE (PIGMENTED)



D218 CASHMERE (NEW)



D216 LATTE (NEW)

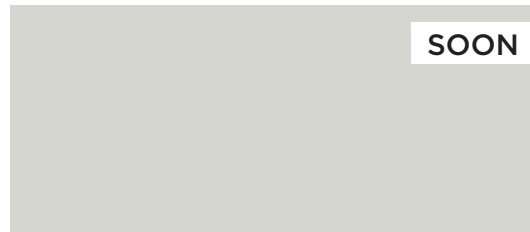


D217 ICE GREY (NEW)



D164 LUNA




D143 ANTHRACITE

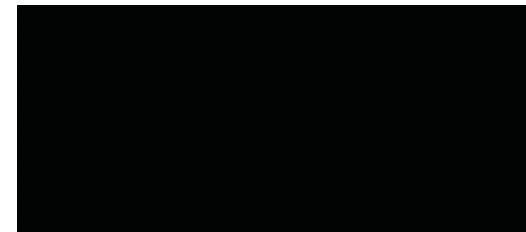


D186 PIANO BLACK (PIGMENTED)



D149 MERLO



D168 BERRY



D188 DEEP




F267 SILVER LEAF



F266 GOLD LEAF



F268 COPPER LEAF

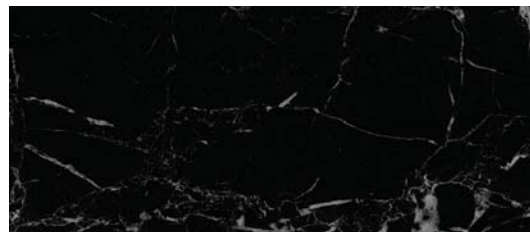

F291 TUNIS MARBLE



F299 PIETRA (NEW)


The colors may vary on digital media. Please check with original sample.

REFLECTION
OF THE **PLAIN**
COLORS


PLAIN



D215 ARCTIC WHITE
(PIGMENTED)

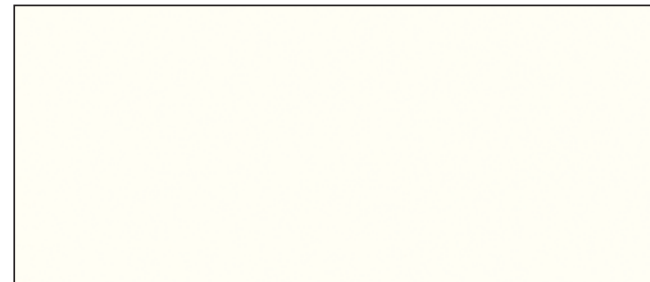


D214 PORCELAIN WHITE
(PIGMENTED)

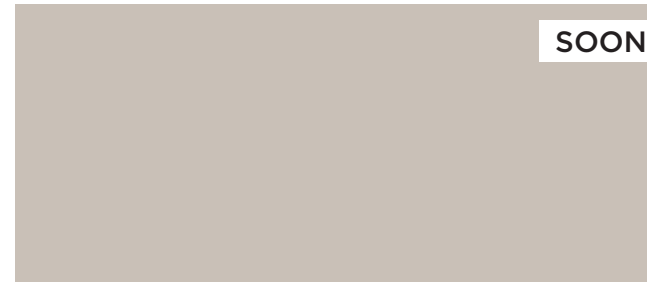

D218 CASHMERE (NEW)



D216 LATTE (NEW)

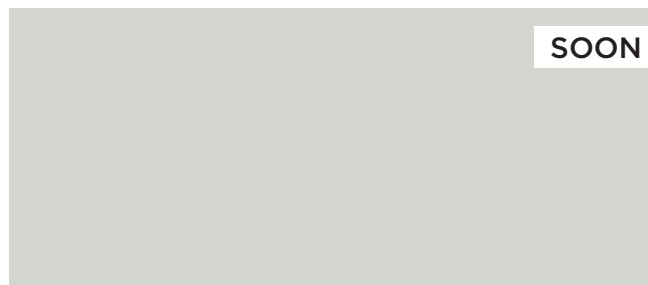

D217 ICE GREY (NEW)



D164 LUNA



D143 ANTHRACITE



D186 PIANO BLACK
(PIGMENTED)

D214 ARCTIC WHITE
(PIGMENTED)

D214 PORCELAIN WHITE
(PIGMENTED)



SOON

D216 LATTE (NEW)

SOON

D218 CASHMERE (NEW)


SOON

D217 ICE GREY (NEW)


D164 LUNA



LUNA



D143 ANTHRACITE

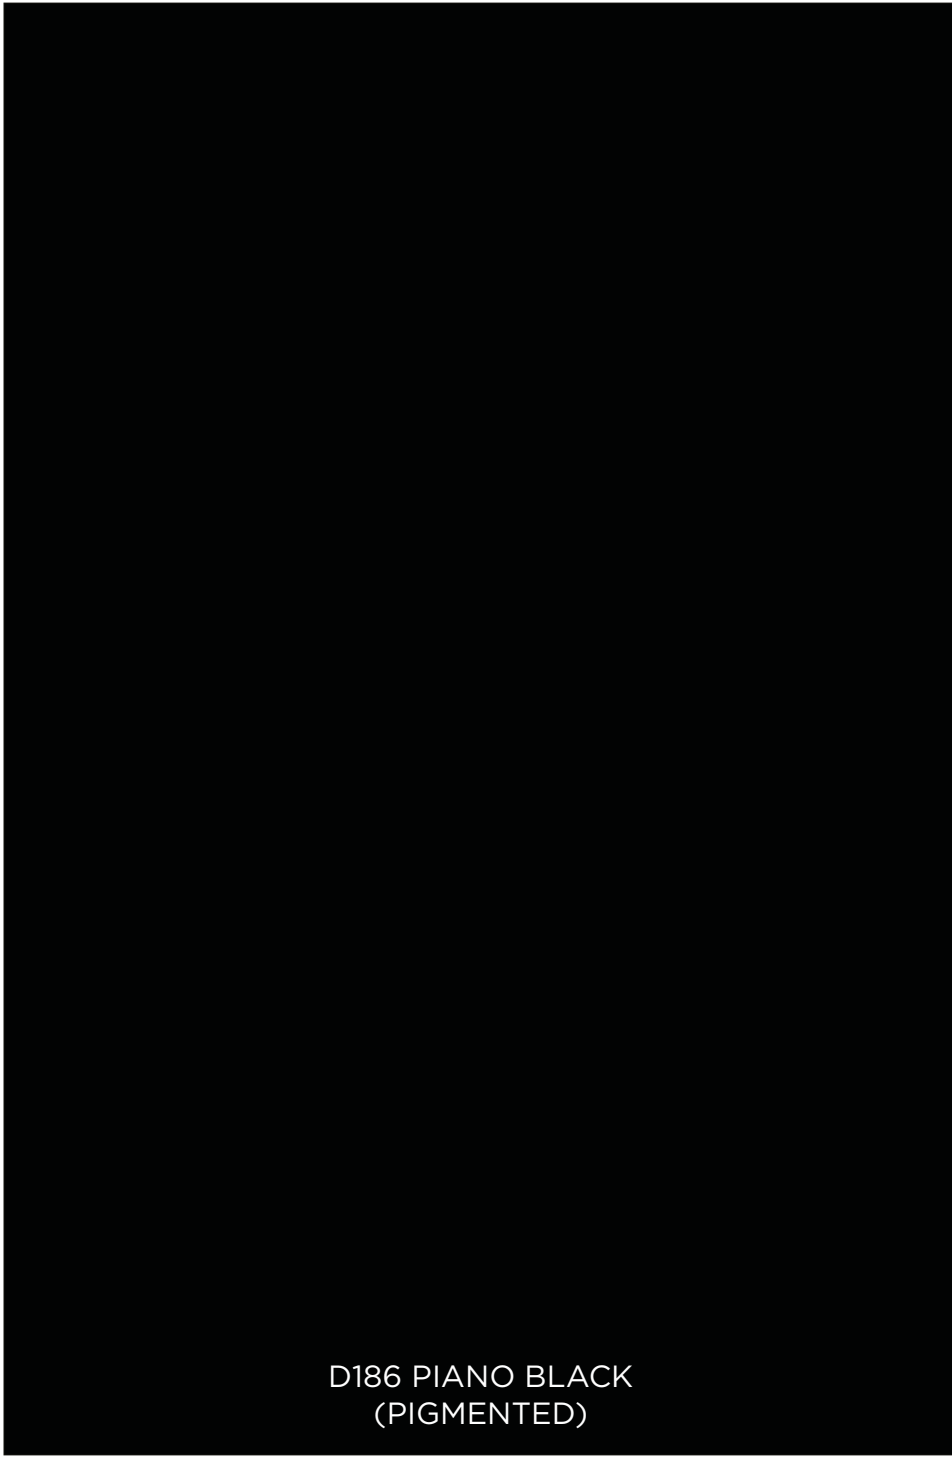

D186 PIANO BLACK
(PIGMENTED)

NOBILITY
OF
BLACK




REFLECTION OF
THE **MODERN**
COLORS


MODERN



D149 MERLO



D168 BERRY



D188 DEEP



D149 MERLO


D168 BERRY

BLUE BREEZE

D188 DEEP

REFLECTION OF
THE **NATURAL**
COLORS

NATURAL

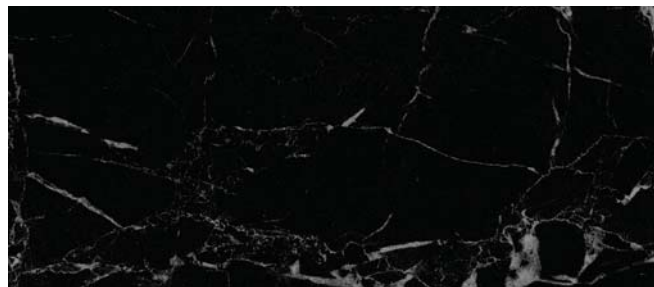

F291 TUNIS MARBLE



F299 PIETRA (NEW)

MARBLE SPARKLE



SOON

F299.PIETRA (NEW)



NATURAL



REFLECTION

OF THE **STYLISH**

COLORS

STYLISH




F267 SILVER LEAF



F266 GOLD LEAF




F268 COPPER LEAF

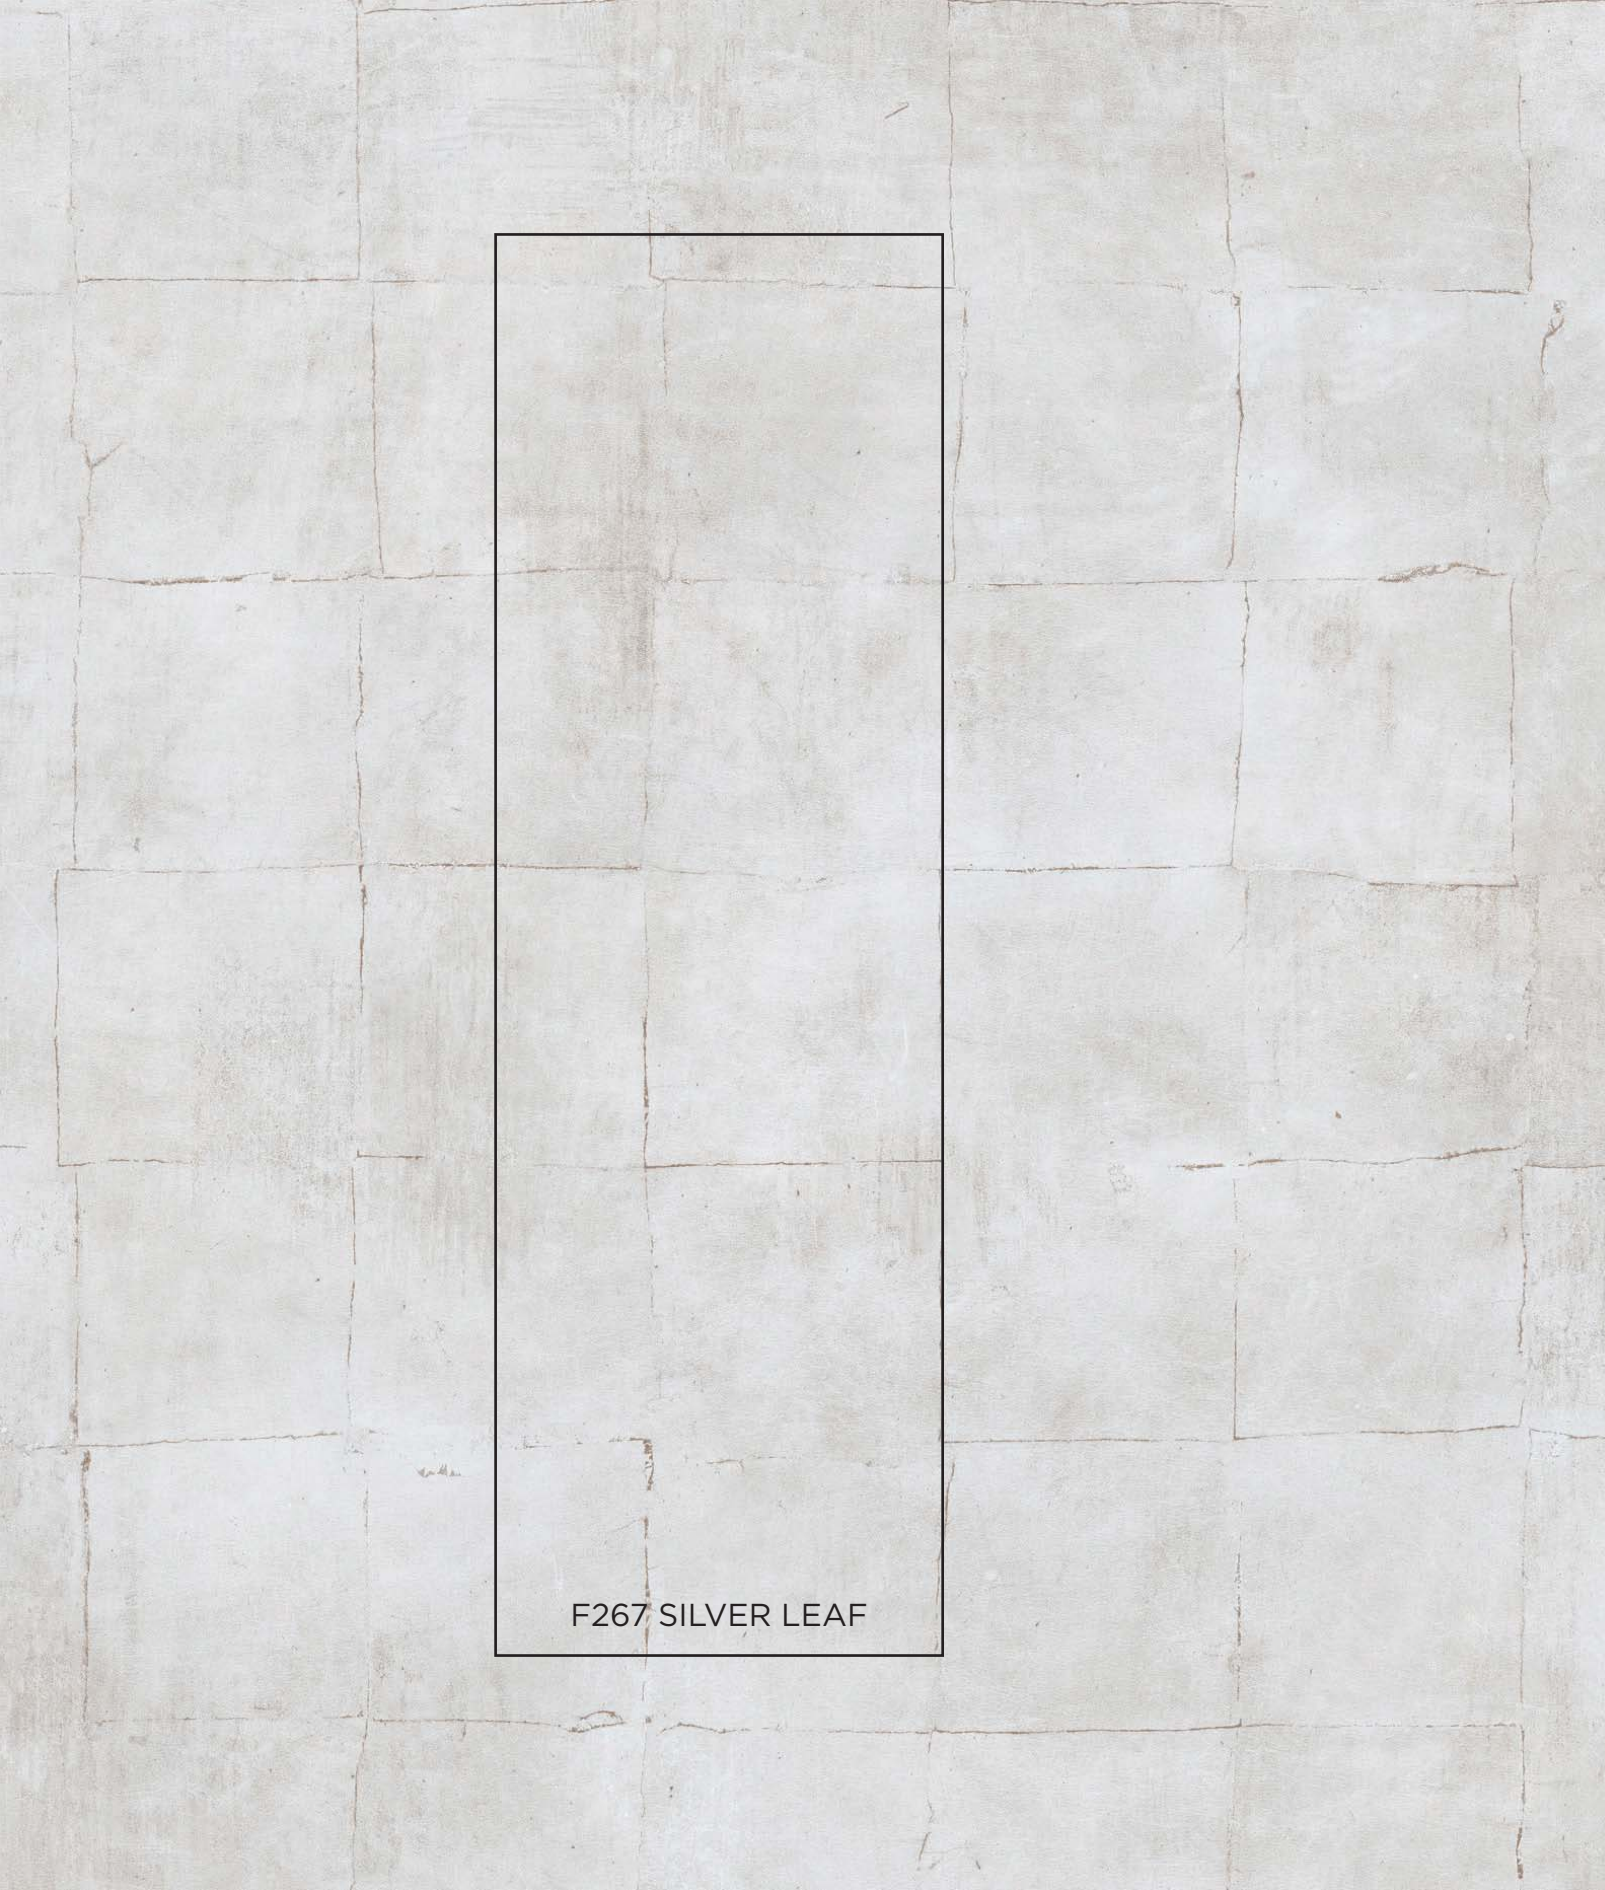


F267 SILVER LEAF



F266 GOLD LEAF

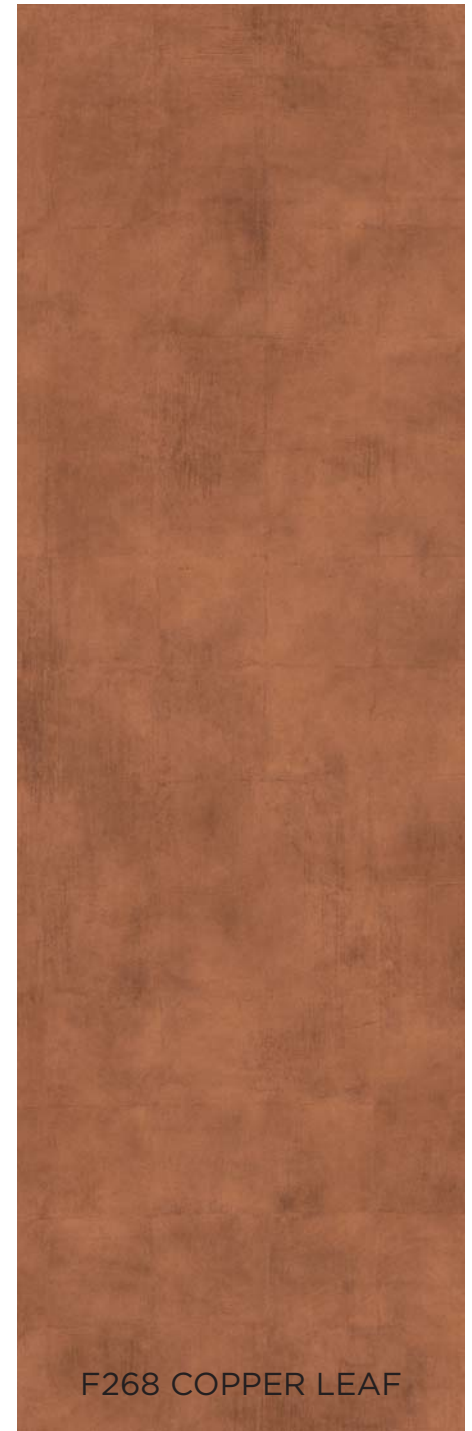

F268 COPPER LEAF

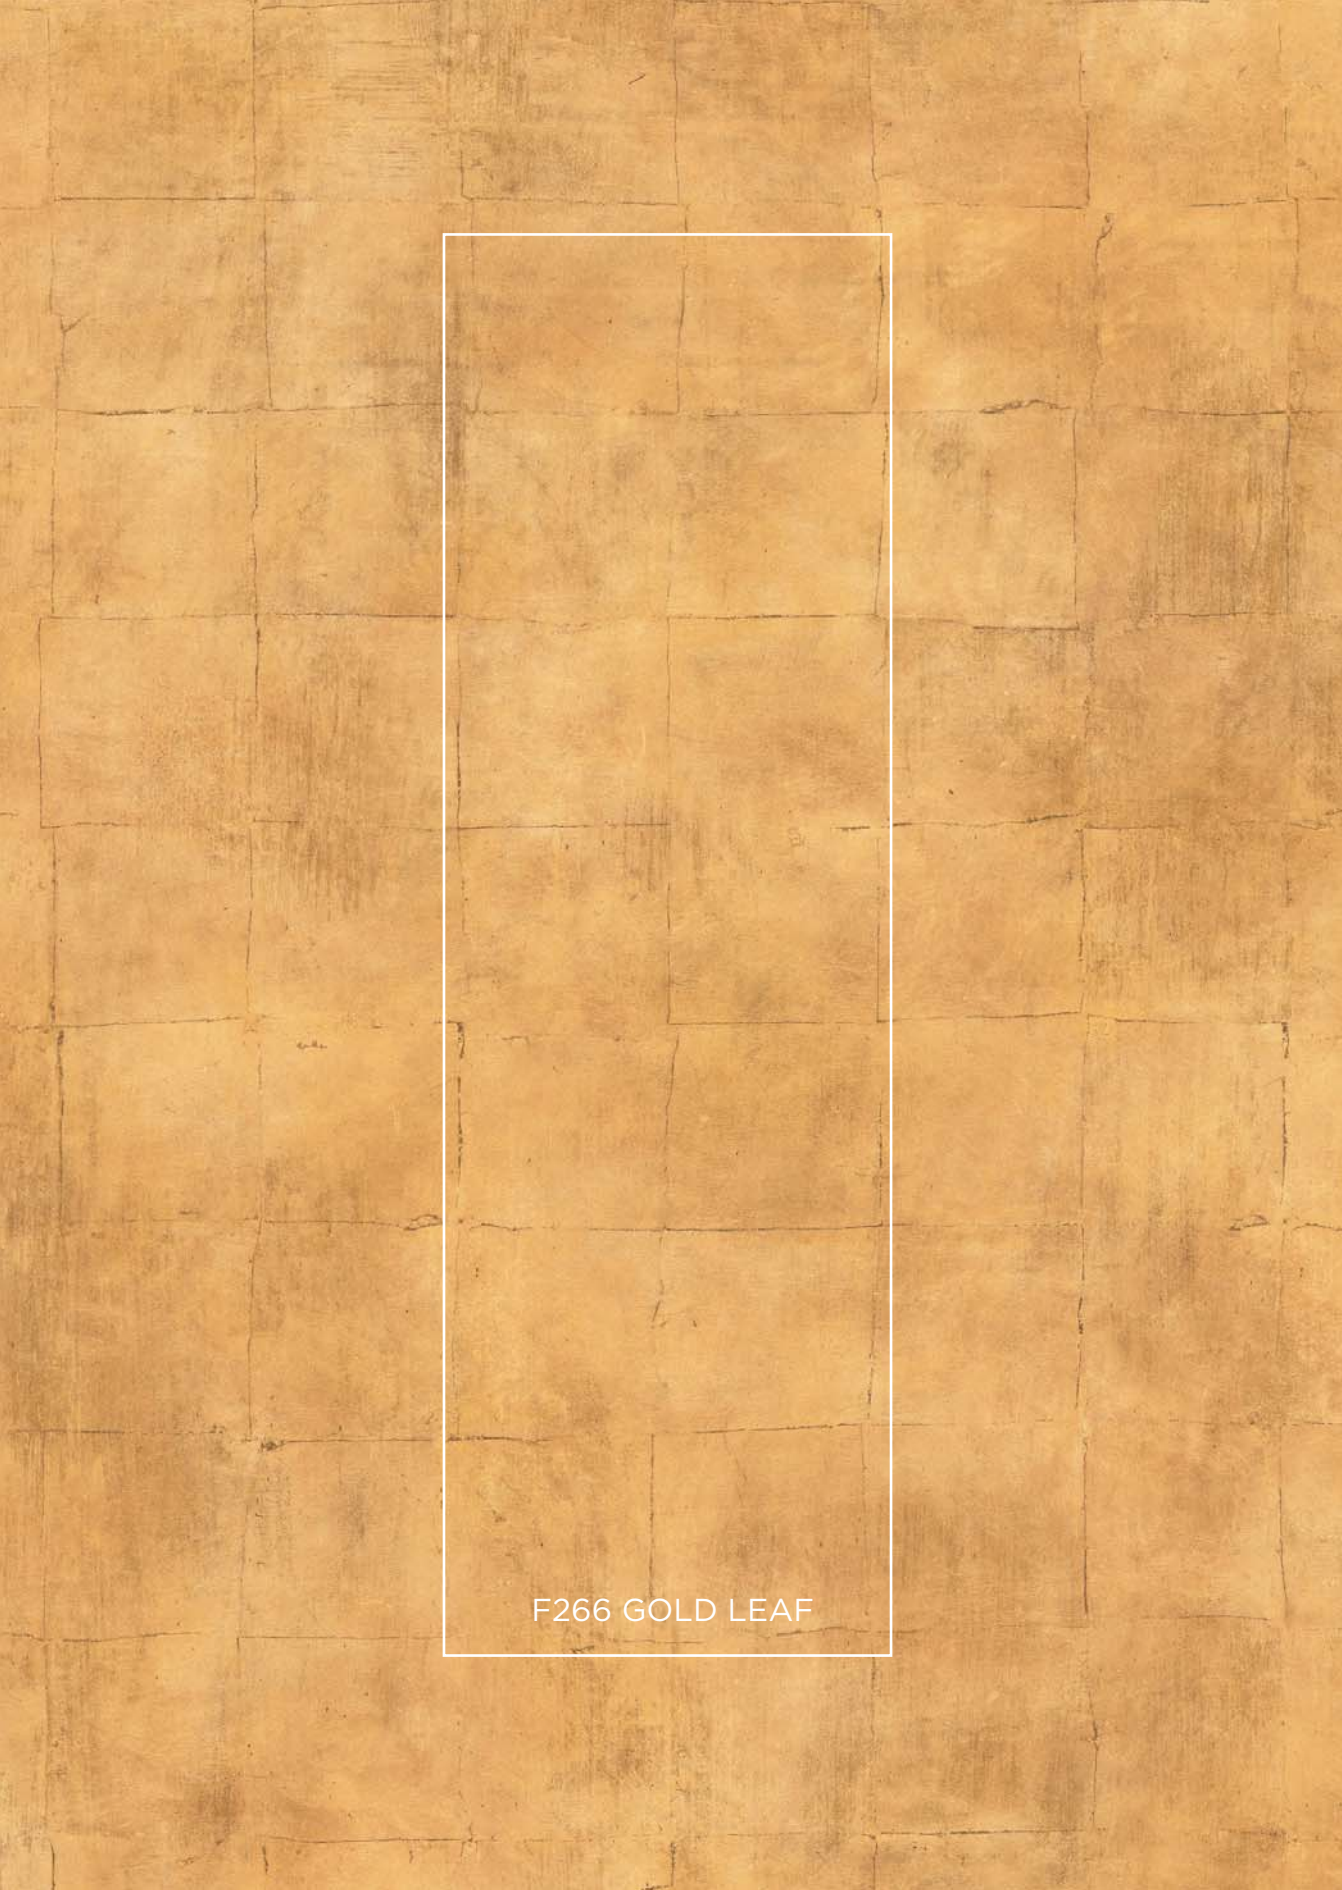

F266 GOLD LEAF




GLOSSMAX PRO

MANUFACTURING, INSTALLATION AND MAINTENANCE INSTRUCTIONS

CUTTING AND SIZING

- The protecting foam of the surface should be removed before cutting. It is recommended to remove the protective transparent foil as soon as possible after the installation is completed (no later than 3 months after the delivery time).
- Products that are covered with protective foil (for protection purposes) minimize the damage that may occur during the production process and protect the glossy panel until the finished product. Therefore, the protective foil should not be removed until the finished product in order to minimize such damages.

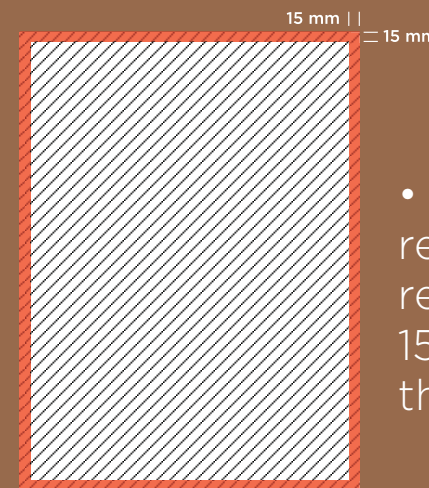

- While sizing the panel, if needed after removing the protecting foam, it is required to leave a trim size of minimum 15 mm from 4 sides each before removing the transparent foil.

TOOLS

For the best-quality coating of GLOSSMAX PRO, the following instrument using guidelines are important:

- Sizing can be made with standard wood working tools.
- The tools must be sharp and freshly whetted.
- Hard metal or diamond-tipped cutting edges will provide the best results.
- Use the cutting and seeding rates recommended by the authorized tool supplier.
- Perform a regular and sufficient new sharpening program in accordance with the recommendations of the tool supplier.

It is necessary to provide proper settings for the treatment of gloss surfaces, which means that all tools must be kept sharp. The machine must be stabilized, adjusted and kept in good condition. All equipment must be as clean as possible.

GLOSSMAX PRO

MANUFACTURING, INSTALLATION AND MAINTENANCE INSTRUCTIONS


- The glossy surface placed in protective transparent foil may be faced upwards during the cutting process. There is no need to invert the panel.
- For a cleaner cut, a plotter saw must be used at the bottom side. Cutting without a plotter saw is not recommended.
- After banding the edges, it is recommended to apply a pre-mill.
- The panel must always be firmly supported and placed in the machine while being processed.
- The snapping effect of the edges must be checked during cutting. If the snap effect exceeds your tolerance, it means that the saw is blunt. The cutting must be continued with the whetted saw blade.
- Products that have been cut with 45 degrees should be turned into covers as soon as possible.
- In order to prevent the damage to the surface, the surface protection foil must not be removed until the installation is completed.

SURFACE AND FLAW CONTROL

A micro defect that can be addressed to as a defect can be detected under the following conditions (which apply to stains or debris as well as fibers or scratches).

The evaluation is made in sunlight-like lighting (5000 Kelvin).

- Visibility at least 700 mm from the surface of the panel
- Vision time: maximum 20 sec
- Light intensity: 800-1600 lux
- Inclination angle of the product: 45 degrees

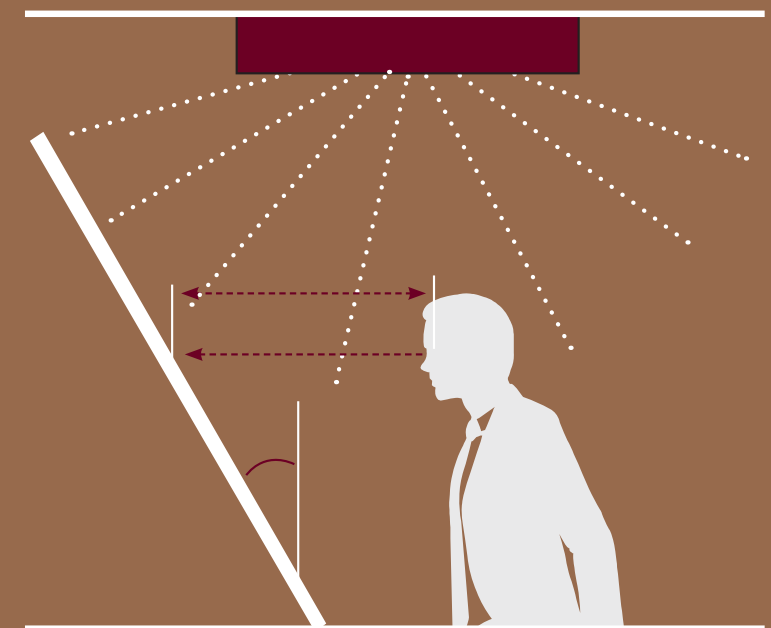

GLOSSMAX PRO

MANUFACTURING, INSTALLATION AND MAINTENANCE INSTRUCTIONS

STORAGE INSTRUCTIONS

- The products are designed for interior settings. This should be taken into consideration while performing the applications.
- The panels should not be exposed to direct sunlight.
- The GLOSSMAX PRO product should be stored and processed in a suitable environment where the temperature is between 10-35 OC (and the relative air humidity is between 50-60%).
- Panels should be carefully stacked in order to avoid dents, collapses and breaks on edges and corners while processing.
- In addition to the top and bottom panels of the stack, the other panels in the package show faster reactions to the changing environmental effects (e.g. climate). Therefore, use cover panels.
- Protective transparent foil coated panels should not be exposed to direct sunlight (infrared rays).
- During the transportation process, the products must be removed without rubbing against each other.
- When the product is arranged horizontally in the storehouse, it should be stowed on the wedges at equal intervals to prevent rotation.
- While stacking on top of each other, the wedges must be aligned and same quantity.
- Vertical stocking of a large number of products should be avoided, and support should be used in such vertical stocking.
- Color tones should be checked in successive tasks.
- Products should not be used in places that are open such as gardens, washed with water and directly exposed to steam.

Avoid exposure of the product to the following conditions during transport, storage and processing!

- Storage in the immediate vicinity of heating sources (presses / dryers)
- Exposure to heat and sunlight (external infrared light)
- Improper ventilation with increased air humidity
- Storage under direct flow

GLOSSMAX PRO

MANUFACTURING, INSTALLATION AND MAINTENANCE INSTRUCTIONS

MAINTENANCE AND CLEANING

The protective transparent foil coating must be removed after the end of the installation. After removing process, the surface is ready for daily use. A little amount of soapy solution is sufficient for general cleaning.

- Do not use alcohol based surface cleaners and scrubbers. These products will make the surface dull and scratched when applied.
- Excessive exposure to thinner and acid-containing substances for cleaning purposes will lead to surface deformation.

Important: Do not use dish washing sponges, abrasive and alcohol based cleaners.

PROCESSING RULES

- These rules are merely advices. They are issued without warranty and liability and do not constitute a special contract. Before using this product, the user is obliged to test whether the specifications that are specified in the “Specifications Table” are appropriate for their particular purpose or projects.
- The GLOSSMAX PRO product is continually improving as in tool and machine technologies, processes and value-adding activities. Please follow for the updates and current product regulations.




The mark of
responsible forestry




CONTACT US!

 www.rim-k.com

 (81) 1931 5525
(81) 1931 5526

 rkane@rim-k.com
pkane@rim-k.com

 Genaro Garza García #104
Torre Cima Col. Palo Blanco
Garza García , N.L.